

**MICRODUCT 3/36 CABLE SYSTEM**

MIN BEND RAD:  
 THIN DIRECTION: 140mm  
 WIDE DIRECTION: 300mm


MAX INSTALLATION PULL FORCE: 800N (80kg)

OUTER SHEATH REMOVAL:  
 SHEATH CUTTERS WITH CARE

INNER SHEATH REMOVAL:  
 USE RIPCORD PROVIDED

SOME MUNICIPALITIES REQUEST CORE SAMPLES TO PROVE DEPTH OF COVER. THIS IS AN EXAMPLE OF A 4" DIAMETER CORE THAT IS ALSO BEING USED TO ASSIST A 90° BEND IN THE MICRODUCT.

CONSIDER RE-USING THE CORE DURING THE RESTORATION PROCEDURE.

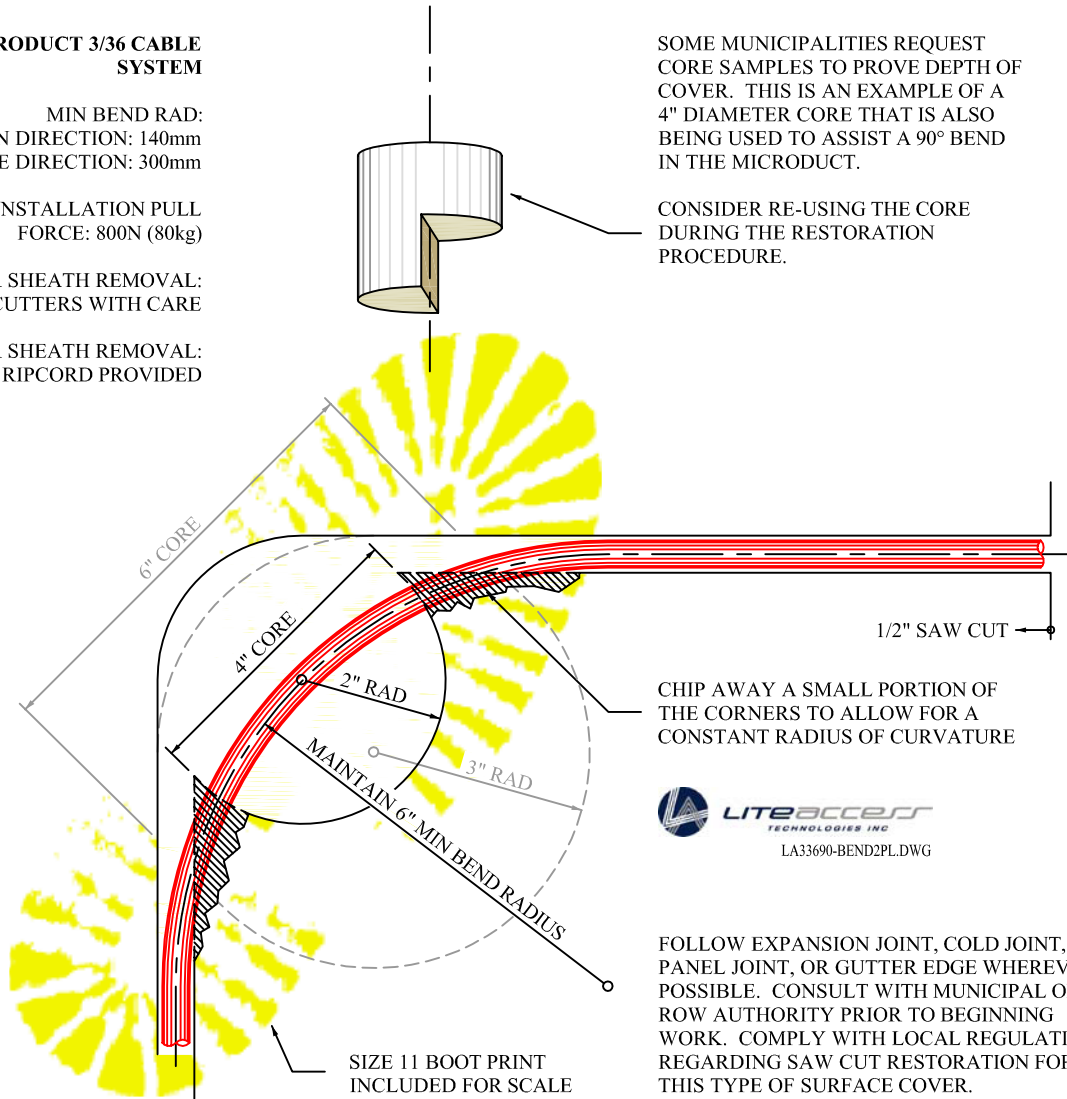

CHIP AWAY A SMALL PORTION OF THE CORNERS TO ALLOW FOR A CONSTANT RADIUS OF CURVATURE

**LITEACCESS**  
 TECHNOLOGIES INC  
 LA33690-BEND2PL.DWG

FOLLOW EXPANSION JOINT, COLD JOINT, PANEL JOINT, OR GUTTER EDGE WHEREVER POSSIBLE. CONSULT WITH MUNICIPAL OR ROW AUTHORITY PRIOR TO BEGINNING WORK. COMPLY WITH LOCAL REGULATIONS REGARDING SAW CUT RESTORATION FOR THIS TYPE OF SURFACE COVER.

**SAWCUT DETAIL - 90° BEND**

- PLAN VIEW - SCALE: N.T.S. - UPDATED 20070804

**DISCLAIMER**

THE LOCATIONS OF UTILITIES OR STRUCTURES SHOWN ON THIS DRAWING ARE APPROXIMATE ONLY. AXISS TECHNOLOGIES, LLC & BSE HEREBY DISCLAIMS ANY RESPONSIBILITY TO THIRD PARTIES FOR THE ACCURACY OF THIS INFORMATION. PERSONS PERFORMING SURFACE INLAY WORK MUST CONTACT THE APPROPRIATE CALL-BEFORE-YOU-DIG SYSTEM TO ASCERTAIN THE LOCATION OF UNDERGROUND UTILITIES PRIOR TO PERFORMING ANY EXCAVATION, DRILLING, OR SAWCUTTING