


MICRODUCT 3/36 CABLE SYSTEM

MIN BEND RAD:
THIN DIRECTION: 140mm
WIDE DIRECTION: 300mm

MAX INSTALLATION PULL
FORCE: 800N (80kg)

OUTER SHEATH REMOVAL:
SHEATH CUTTERS WITH CARE

INNER SHEATH REMOVAL:
USE RIPCORD PROVIDED

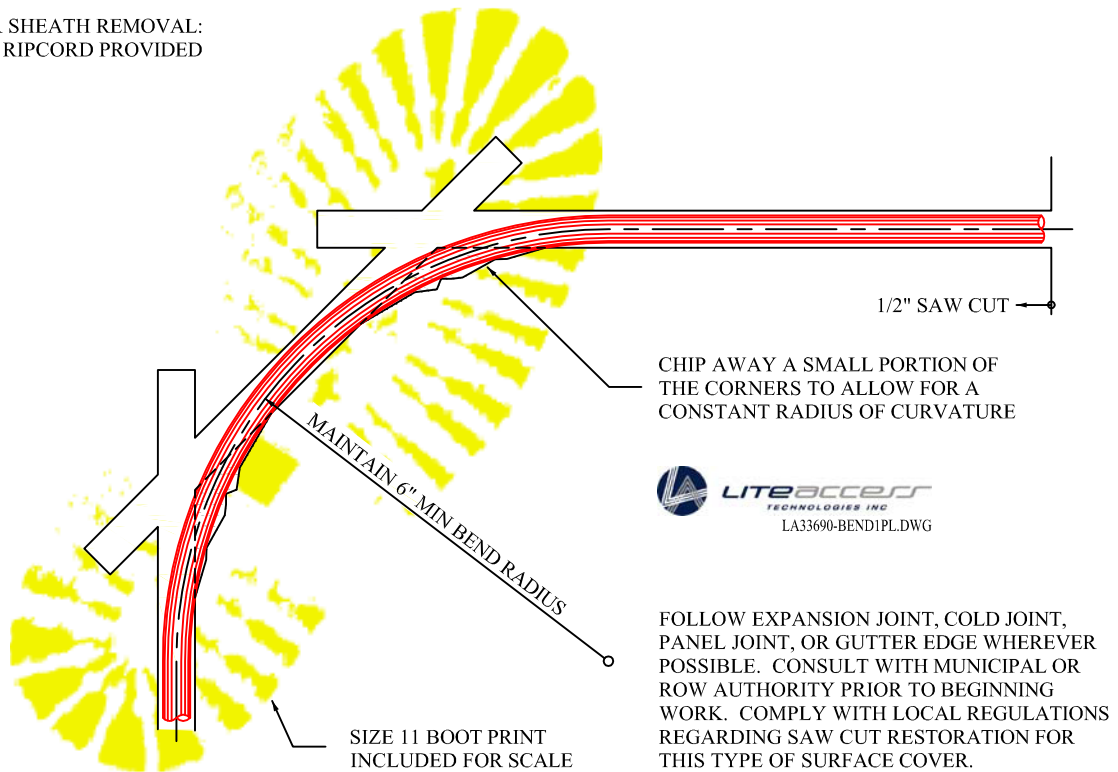

SAWCUT DETAIL - 90° BEND

- PLAN VIEW - SCALE: N.T.S. - UPDATED 20070804

DISCLAIMER

THE LOCATIONS OF UTILITIES OR STRUCTURES SHOWN ON THIS DRAWING ARE APPROXIMATE ONLY. AXISS TECHNOLOGIES, LLC & BSE HEREBY DISCLAIMS ANY RESPONSIBILITY TO THIRD PARTIES FOR THE ACCURACY OF THIS INFORMATION. PERSONS PERFORMING SURFACE INLAY WORK MUST CONTACT THE APPROPRIATE CALL-BEFORE-YOU-DIG SYSTEM TO ASCERTAIN THE LOCATION OF UNDERGROUND UTILITIES PRIOR TO PERFORMING ANY EXCAVATION, DRILLING, OR SAWCUTTING